Panasonic

Panaboard takes notes instead of you
Improves your Presentations and meetings

- Plain paper printing with multiple copies.
- Panaboard can work as a PC printer.
- Panaboard can be controlled from PC.
- Panaboard increases efficiency and reduces meeting time.
- Panaboard can be wall-mounted or used with floor-stand option.

Panaboard
Metallic Design
Plain Paper Printing

Panaboard
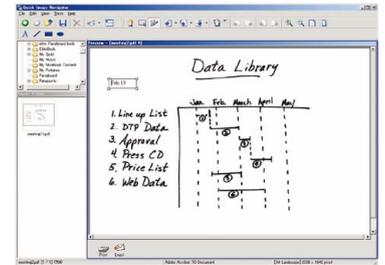## Improves your Presentations and Meetings

PC Interface

TWAIN Driver

By just one click, you can scan the image on the Panaboard screen as image data to your computer and from your computer, you can control the Panaboard function just like operating the Panaboard control panel.

Quick Image Navigator

Scanned data can be quickly displayed and edited. All information can be organized into folders for easy management, and the contents of the folders can be checked by viewing thumbnail displays.
You can easily edit, print or distribute the scanned data.

Printer Driver

The Panaboard can also work as a PC printer.
In a meeting, if you need to print out some documents, the Plug & Play of USB makes it easy to print out documents from the Panaboard.

1 Screen can also be used for the Projector.

UB-7325 Specifications

General

Power Supply	AC 100 - 120 V, 50 / 60 Hz or AC 220 - 240 V, 50/60 Hz
Power Consumption	1.40 A (AC 100 - 120 V) or 0.75 A (AC 220 - 240 V)
External Dimensions (H × W × D,without stand)	1,396 mm x 1,648 mm x 264 mm (55.0 in × 64.9 in × 10.4 in)
Weight (without stand)	42.5 kg (93.7 lbs)

Input Block

Panel Dimensions (H X W)	900 mm X 1,400 mm (35.4 in × 55.1 in)
Number of Sheets	4 (endless type)*1
Copying Area (H X W)	850 mm X 1,330 mm (33.5 in × 52.4 in)
Scanning System	CIS (Contact Image Sensor)

Printer Output Block

Printing System	Fusion thermal transfer type
Copy Paper	Standard / Recycled paper (60 - 90 g / m² / 16 - 24 lbs)
Copy Paper size	A4 or Letter
Copy Density	8 dots / mm
Copy Colour	Monochrome
Time Required for Copying	15 s / sheet
Continuous Copies	1 to 9
Contrast Adjustment	Two levels : Normal / Dark

System Requirements

Computer	IBM® PC/AT or compatible machine
CPU	Intel® Pentium II or higher processor
Interface	USB 1.1 or USB 2.0 (This electronic board functions with USB 1.1.)
Operating System	Windows® 98, Windows® Me, Windows® 2000, Windows® XP (Windows® XP 64-bit edition is not supported.), Windows Vista®, Windows® 7, Windows® 8*2 (except for Windows® RT)
Memory	Windows® 98, Windows® Me: 64 MB or more, Windows® 2000: 128 MB or more, Windows® XP: 256 MB or more, Windows Vista® , Windows® 7, Windows® 8: 512 MB or more
Hard Disk	At least 240 MB free space (except saving space for image file)

Accessories

• Operating instructions, Installation manual • Power Cord • Markers (black, red and blue, one each)
• A4 or Letter Size Paper for test (20 sheets) • Thermal Transfer Film (10m [32ft. 9 3/4 in]) • Software CD-ROM • Eraser (one pc.)

Optional Equipment

Wall-Mounting Kit	KX-B063
Stand	KX-B061

Separately Available

Replacement film	UG-6001 (Set of 2 rolls [50m <164 ft. 1/2 in>])
Markers	KX-B031 (set of 10 black markers), KX-B032 (set of 10 red markers), KX-B033 (set of 10 blue markers)
Erasers	KX-B042 (set of 6 erasers)
Marker and Eraser Set	KX-B035 (contains 1 black, 1 red and 1 blue markers and 1 eraser)

*1 Screen can also be used for the Projector.
*2 Please download the latest printer driver and application for Windows® 8 from the following web site: http://panasonic.net/pcc/support/eboard/

Trademarks and registered trademarks

– Microsoft Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.
– IBM is a trademark of International Business Machines Corporation in the United States, other countries, or both.
– Intel and Pentium are trademarks of Intel Corporation in the U.S. and other countries.
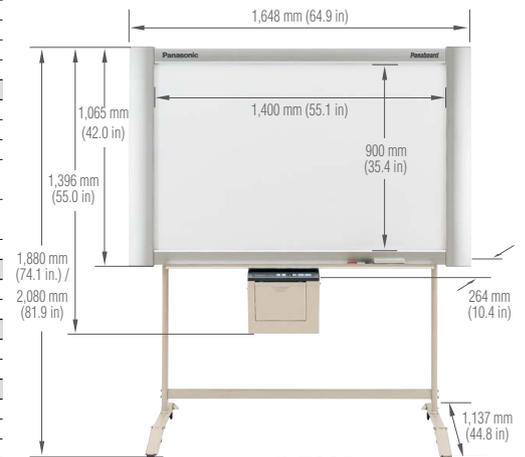
Important

– Safety Precaution: carefully read the operating and installation instructions before using this product.

UB-7325
4-Screen Standard size
(Stand option)

1,648 mm (64.9 in)
1,400 mm (55.1 in)
900 mm (35.4 in)
1,065 mm (42.0 in)
1,396 mm (55.0 in)
1,880 mm (74.1 in.) / 2,080 mm (81.9 in)
264 mm (10.4 in)
1,137 mm (44.8 in)

Design and specifications are subject to change without notice. All photographs in this brochure are simulated.

This product is designed to reduce hazardous chemical substances to meet the RoHS directive.

DISTRIBUTED BY :